

Description

Reinforced film with UV resistance, good light transmission, very flexible.

Applications

Multiple use reinforced film for e.g. greenhouses, market stalls, dust-sheet (-wall), covers etc.

Programme

Size(s)	2 x 100 m and 3 x 50m
Colour(s)	transparent
Packing	roll, 3m 1x folded, core diameter 50mm, 23 rolls per pallet

Material

Raw material	HDPE tape fabric leno, LDPE coating
Yarn MD/CD	folded tape 1200 D (2x) / flat tape 1950 D
Construction MD/CD	2,4 / 2,2 inch ²

Properties	Test method	Value	Unit
Fabric weight	ISO 1183-1	220	g/m ²
Tensile strength MD/CD	ISO 1421-1	580 / 440	N/5cm
Elongation MD/CD	ISO 1421-1	20	%
Temperature resistance		-40 / +80	C°
UV stability	ISO 4892	300	Kly
Light transmission		76	%


All data are average values only to be used for reference

Warranty

3 year UV degradation based on Western European conditions

HORTI FILM expert

Product Sheet

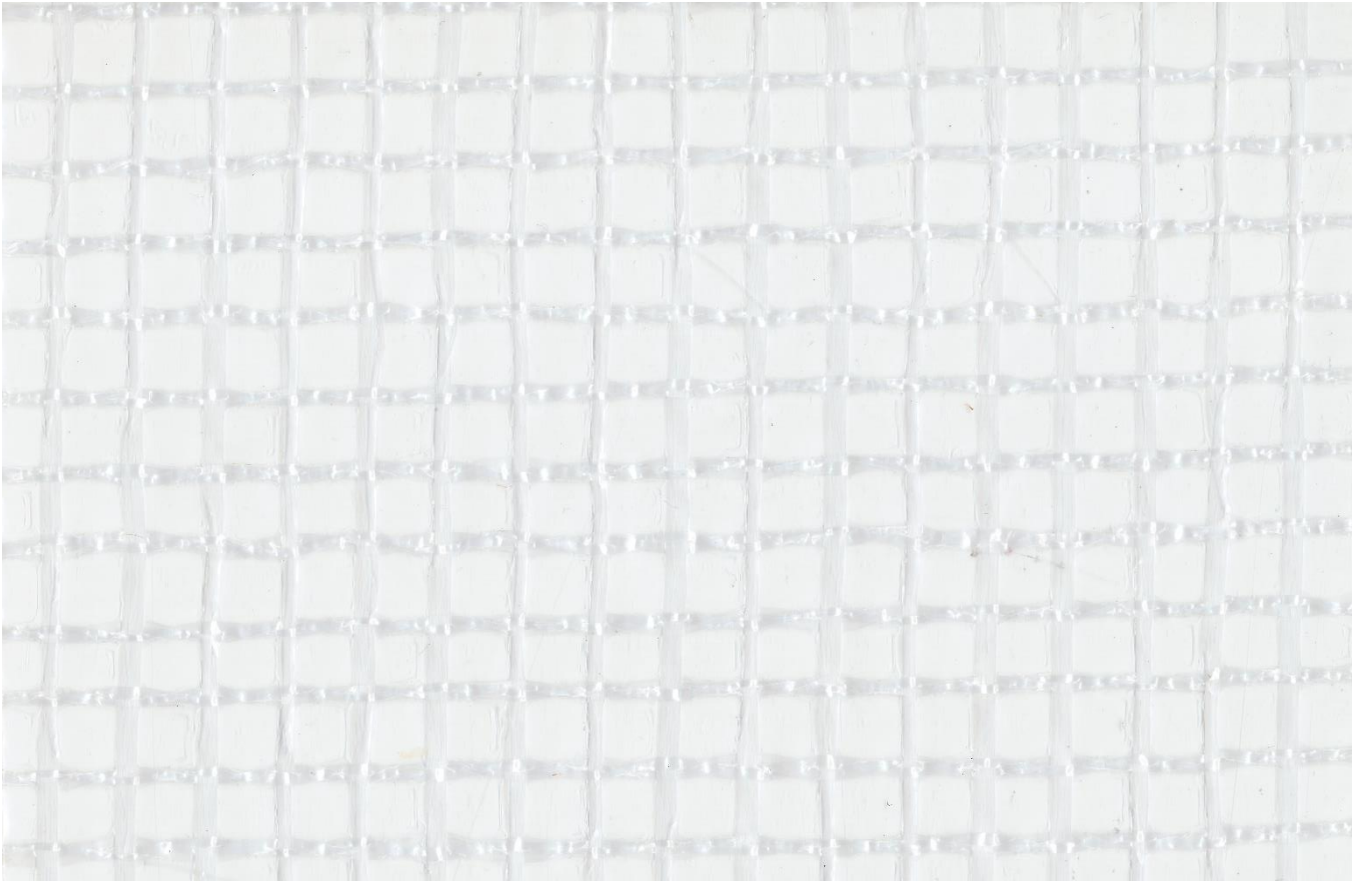

Transparent